

Barrier arm optical turnstiles


## Fastlane® Plus AS

Fastlane Plus models

150SA | 30MA | 400MA | **AS**

### Harmony between security and style

Fastlane Plus AS is a premium optical turnstile with an extended pedestal and barrier arms that can operate in an open mode. It combines advanced optical technology with a barrier arm to detect and physically impede unauthorized access. With Fastlane, security has never looked so inviting.



#### Advanced intelligence

Fastlane turnstiles have an advanced architecture based on distributed intelligence. An infrared beam matrix engineered with multiple microprocessors monitors pedestrian movement with pinpoint accuracy, detecting tailgaters as close as 1/4" apart. Inherently more secure, this technology also enables the fastest entry and minimizes false alarms.

#### IP enabled

Fastlane Plus AS features Fastlane Connect™, a TCP/IP communication and control system that enables Web-based turnstile control from any PC, tablet, smartphone, or from Fastlane's Multilane Controller.

#### Operation

Fastlane Plus AS was designed with additional detection beams that allow it to operate in a Normally Open mode. The barrier arms quickly close for an unauthorized user.

Fastlane Plus AS features four additional operating modes. Turnstiles can be connected to a remote control panel or integrated with third-party systems for electronic mode selection. Fastlane sounds a local alarm if someone enters without authorization.

- › Efforts to push the barriers open will sound a second, louder alarm
- › A secondary relay can trigger CCTV, lock doors, or control elevators
- › Optional locking break for more secure environments

#### User-friendly and safe

Fastlane Plus features multiple safety beams designed to stop the barrier arms from colliding with users. The units feature a Fire Alarm input to allow for safe, unimpeded emergency evacuation and the 400 series features unique self-resetting break away arms for safer operation.



#### High security

Advanced technology for superior entry control

- › Detects tailgaters following behind authorized personnel
- › Impedes intruders with barrier arm



#### Pinpoint accuracy

Intelligence virtually eliminates false alarms

- › Differentiates body mass from smaller objects
- › Increases acceptance, avoiding guard tune out



#### Unsurpassed throughput

Greater return on investment

- › High processing speed reduces traffic build-up
- › Open mode ensures quick user acceptance



#### Superior design

Refined, slim designs accentuate lobby

- › Open mode provides secure and welcome entry
- › Barriers open flush with the pedestal, minimizing footprint



#### Field-proven reliability

Uptime and long lifetime improve bottom line

- › Fewer failures mean lower repair costs
- › Minimizes need for extra guards

Barrier arm optical turnstiles

## Fastlane® Plus AS

Fastlane Plus models

150SA | 30MA | 400MA | **AS**

### Materials

- > Tops: 304 stainless steel with Corian® Deep Black Quartz ends
- > Side panels and end caps: 304 stainless steel with a horizontal grain (240 grit)
- > Barrier arms: brushed aluminum
- > Beam windows: Perspex® 962

In addition to a choice between rounded or squared pedestal ends, a variety of premium and custom options are available to ensure Fastlane complements building aesthetics.

### Visitor management

Fastlane features an optional visitor management input. When activated, unlimited access is allowed for a designated period, after which the system returns to its secure state.

### Disabled access

Fastlane is compliant with ADA as well as most international standards. A wider lane using the same slim pedestals and wider glass allows for wheelchair or cart access. Audio/Visual feedback is standard.

### Options/Accessories

- > Fastlane Technical Services
- > Fastlane Floor Protector
- > Fastlane Infill System
- > Multiple desktop controls- IP or Analog
- > FastScan™ Tenant/Visitor System
- > Multiple Reader Mounting Options
- > Icon Status Display

Please see Fastlane accessories data sheets for additional details.

### Technical specifications

#### Pedestal dimensions (standard and ADA)

- > Height: 38" (965 mm)
- > Width: 6.6" (168 mm)
- > Length: 50.2" (1,275 mm)

#### Barrier arms

- > Retracting, breakaway arms, self returning
- > Diameter: 1.5" (38mm) tube
- > Standard length: 10.7" (271 mm)
- > ADA length: 15.6" (396 mm)

#### Lane width

- > Standard lane: 23-28" (600-700mm)
- > ADA lane: 33-38" (850-960 mm)

#### Opening/closing time

- > 1/2 second minimum

#### Throughput\*

- > 1 person / second (subject to response time of access control system)

#### Tailgate detection distance

- > 1/4 inches (5 mm) minimum

#### Barrier variable breakaway force

- > Standard arm: 70 Newton (7.1 kg) typical
- > ADA arm: 50 Newton (5.1 kg) typical

#### Display

- > Tri-color, LED end of turnstile indicators: red, white, green

#### Sounders

- > Single tone sounder: card authorization and turnstile obstruction
- > Multi-tone variable volume sounder: alarm condition

#### Optics

- > Optical turnstile - pulsed multi-infrared beam array, synchronized for detection and safety
- > Environmentally hardened to avoid sunlight interference

#### Operating modes

- > Card in/card out
- > Card entry/free exit
- > Free entry/card out
- > Free entry/free exit

#### Ethernet Connection

- > RJ45 TCP/IP port

#### Power requirements

- > Input: 115 V AC, 60 Hz or 230 V AC, 50 Hz
- > Output: 24 V DC, 60 W, 1.25 A

#### Inputs from Access Control

- > Require voltage-free contacts (current sense 1 mA typical)
- > Entry request (normally open closing for 1 second)
- > Exit request (normally open closing for 1 second)
- > Visitor access in & out (normally open momentary push button)
- > Fire panel integration- Opto-coupled Input 12-24 Vdc @ 25mA nomina

#### Outputs to Access System

- > Voltage free relay contacts rated 0.5A, 28 V DC for output to system
- > Lane entered (NC)
- > Lane exited Exit (NC)
- > Alarm 1 (NC, opening for 1-16s)
- > Alarm 2 (NC, opening for 1s)

#### Certifications (power supply only)

- > UL 2593
- > UL 60950-1, 2nd edition
- > CSA C22.2 No. 60950-1-07, 2nd edition

\* Expected time to pass through turnstile.


Due to continuous improvements, specifications are subject to change without prior notice.

### Details

#### Fastlane Plus AS dimensions

(standard, square ends, single turnstile).

Please see the Fastlane Plus AS Drawing Pack for additional details.

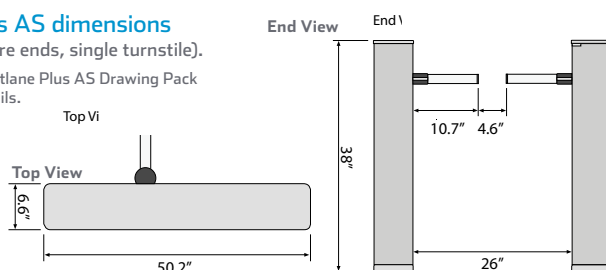

With thousands of systems installed on 6 continents, Fastlane is a world leader in elegant and intelligent optical turnstiles.

Manufactured by Integrated Design Limited. Fastlane is a registered trademark of IDL, 1995.

