

Barrier-free turnstiles

Fastlane® Compact

Optical models

CS 200 | CS 400 | 400 OT | **Compact**

Streamlined optical detection

Fastlane Compact is the smallest Fastlane optical turnstile. It combines advanced optical technology with a streamlined pedestal to detect and alarm unauthorized access. With Fastlane, security has never looked so inviting.

Advanced intelligence

Fastlane turnstiles have an advanced architecture based on distributed intelligence. An infrared beam matrix engineered with multiple microprocessors monitors pedestrian movement with pinpoint accuracy, detecting tailgaters as close as 1/4" apart. Inherently more secure, this technology also enables the fastest entry and minimizes false alarms.

Operation

The Compact is designed to operate in a normally secure mode, and:

- > Allows access only after system approval
- > Automatically sounds a local alarm if someone enters without authorization
- > Has a secondary relay that can trigger CCTV, lock doors, or control elevators

User-friendly and safe

The absence of a physical barrier ensures fast throughput and unrestricted movement for all personnel, with safe disabled access and free emergency egress in the event of a fire alarm or power outage. Users are greeted by an intuitive interface, which automatically guides the user through the entry and exit procedure, ensuring fast easy access for authorized users.



High security

Advanced technology for superior entry control

- > Detects tailgaters following behind authorized personnel
- > Beam matrix profiles entire lane



Pinpoint accuracy

Intelligence virtually eliminates false alarms

- > Differentiates body mass from smaller objects
- > Increases acceptance, avoiding guard tune out



Unsurpassed throughput

Greater return on investment

- > High processing speed reduces traffic build-up
- > One person per second minimizes turnstiles required



Superior design

Refined, slim designs accentuate lobby

- > Takes up less space – only 18 inches long
- > Lack of physical barrier provides welcome entry



Field-proven reliability

Uptime and long lifetime improve bottom line

- > Fewer failures mean lower repair costs
- > Minimizes need for extra guards

Barrier-free turnstiles

Fastlane® Compact

Optical models

CS200 | CS 400 | 400 OT | **Compact**

Materials

- > Tops: Corian® Deep Black Quartz
- > Side panels and end caps: 304 stainless steel with a horizontal grain
- > Beam windows: Perspex® 962

In addition to a choice between rounded or squared pedestal ends, a variety of premium and custom options are available to ensure Fastlane complements building aesthetics.

Visitor management

Fastlane features an optional visitor management input. When activated, unlimited access is allowed for a designated period, after which the system returns to its secure state.

Disabled access

Fastlane is compliant with ADA as well as most international standards. A wider lane using the same slim pedestals allows for wheelchair or cart access. Audio/Visual feedback is standard.

Options/Accessories

- > Fastlane Technical Services
- > Fastlane Floor Protector
- > Fastlane Infill System
- > Fastlane Remote Control
- > FastScan™ Tenant/Visitor System
- > Multiple Reader Mounting Options

Please see Fastlane accessories data sheets for additional details.

Technical specifications

Pedestal dimensions (standard and ADA)

- > Height: 37.7" (957 mm)
- > Width: 6.6" (168 mm)
- > Length: 17.6" (446 mm)

Lane width

- > Standard lane: 19.6-28" (550-700 mm)
- > ADA lane: 33-39" (850-1,000 mm)

Throughput*

- > 1 person / second (subject to response time of access control system)

Tailgate detection distance

- > 1/4 inch (5mm) minimum

Display

- > Tri-color end-of-turnstile LED display

Sounders

- > Single tone sounder: card authorization
- > Multi-tone variable volume sounder: alarm condition

Optics

- > Pulsed multi-infrared beam array, synchronized for detection.
- > Environmentally hardened to avoid sunlight interference.

Operating modes

- > Card in/card out
- > Card entry/free exit
- > Free entry/card out
- > Free entry/free exit

Power requirements

- > Input: 115 V AC, 60 Hz or 230 V AC, 50 Hz
- > Output: 24 V DC, 60 W, 1.25 A

Inputs from Access Control

- > Require voltage-free contacts (current sense 1 mA typical)
- > Entry request (normally open, closing for 1 second)
- > Exit request (normally open, closing for 1 second)
- > Visitor access in & out (normally open momentary push button)
- > Fire panel integration- Opto-coupled Input 12-24Vdc @ 25mA nomina

Outputs to Access System

- > Voltage free relay contacts rated 0.5A, 28 V DC for output to system
- > Lane entered (NC)
- > Lane exited Exit (NC)
- > Alarm 1 (NC, opening for 1-16s)
- > Alarm 2 (NC, opening for 1-16s)

Flow control and alarm outputs

- > Ready for entry (normally closed, normally open, common poles)
- > Ready for exit (normally closed, normally open, common poles)
- > Remote Alarm (normally open)

Certifications (power supply only)

- > UL 60950-1, 2nd edition
- > CSA C22.2 No. 60950-1-07, 2nd edition


* Expected time to pass through turnstile.

Due to continuous improvements, specifications are subject to change without prior notice.

Details

Fastlane Compact dimensions (standard, square ends, single turnstile).

Please see the Fastlane Compact Drawing Pack for additional details.

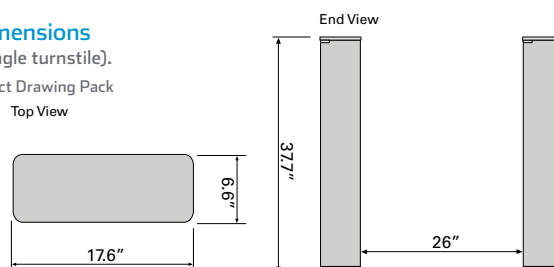

With thousands of systems installed on 6 continents, Fastlane is a world leader in elegant and intelligent optical turnstiles.

Manufactured by Integrated Design Limited. Fastlane is a registered trademark of IDL, 1995.

