

Barrier turnstiles

# Fastlane® Glassgate 155

BARRIER TYPE

FOOTPRINT

GLASS

ARM

OPTICAL



## Broaden Your Horizons

Fastlane Glassgate 155, based upon the aesthetics of the popular Glassgate 150 model, offers additional security and lane width options while maintaining the renowned good looks of the Fastlane range. Glassgate 155 features concealed optical systems for a sleeker look with waist height glass barriers and optional locking brakes. Lane widths up to 47 inches are achievable.

### Advanced intelligence

Fastlane turnstiles have an advanced architecture based on distributed intelligence. An infrared beam matrix engineered with multiple microprocessors monitors pedestrian movement with pinpoint accuracy, detecting tailgaters as close as 1/4" apart. Inherently more secure, this technology also enables the fastest entry and minimizes false alarms.

### IP enabled

Glassgate 155 features Fastlane Connect™, a TCP/IP communication and control system that enables Web-based turnstile control from any PC, tablet, smartphone, or from Fastlane's Multilane Controller.

### Operation

Glassgate is designed to work in a normally closed mode, opening only after an access system approval. The glass barrier swings away from an authorized user. Barriers then either:

- Close quickly behind the authorized person to deter tailgaters
- Stay open for immediate additional authorized users passing in either direction

Glassgate will automatically sound a local alarm if someone enters without authorization.

- Efforts to push past the glass barrier will sound a second, louder alarm
- A secondary relay can trigger CCTV, lock doors, or control elevators

### User-friendly and safe

The Glassgate 155 has a longer pedestal which uses a 56 beam high resolution infrared matrix designed to stop the barriers from moving in the event that any of the beams are broken. The units feature a fire alarm input to allow for unimpeded emergency egress and the units can be configured to fail safe in the event of power fail.



HIGH SECURITY

Advanced technology for superior entry control

- Detects and deters tailgaters in very close proximity
- Class leading infrared detection systems



PINPOINT ACCURACY

Intelligence virtually eliminates false alarms

- Differentiates body mass from smaller objects
- Provides instant feedback of traffic flow and incidents



UNSURPASSED THROUGHPUT

Greater return on investment

- High processing speed reduces traffic build-up
- Door-like motion ensures quick user acceptance



SUPERIOR DESIGN

Refined, elegant designs accentuate lobby

- Glass barriers provide secure and welcome entry
- Barriers open flush with the pedestal, minimizing footprint



FIELD-PROVEN RELIABILITY

Uptime and long lifetime improve bottom line

- Fewer failures mean lower repair costs
- Online diagnostics and support packages

## Materials

- Tops: 304 stainless steel with Corian® Deep Black Quartz ends
- Side panels and end caps: 304 stainless steel with a satin polish
- Barriers: .39" Toughened Safety Glass EN12150 / ANSI 97.1

Fastlane Glassgate 155 comes standard with rounded pedestal ends. A variety of premium and custom options are available to ensure Fastlane complements building aesthetics.

## Visitor management

Fastlane features an optional visitor management input. When activated, unlimited access is allowed for a designated period, after which the system returns to its secure state.

## Disabled access

Fastlane is compliant with ADA as well as most international standards. A wider lane using the same slim pedestals allows for wheelchair or cart access. Audio/Visual feedback is standard.

## Options/Accessories


- Fastlane Technical Services
- Fastlane Floor Protector
- Fastlane Infill System
- Multiple desktop controls - IP or Analog
- FastScan™
- Multiple Reader Mounting Options
- Icon Status Display
- Locking Brake
- Sidegating

Please see Fastlane accessories data sheets for additional details.

## Fastlane Glassgate 155 dimensions

(standard, single turnstile)

Please see the Glassgate 155 Drawing Pack for additional details.

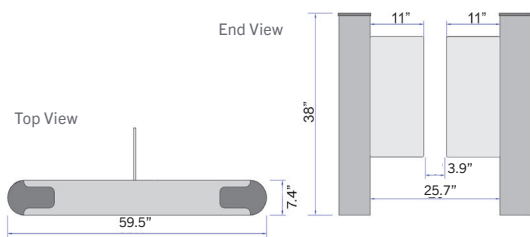

GG150 **GG155** GG200 GG250 GG300 GG400 GLASSWING

### FASTLANE GLASSGATE 155 TECHNICAL SPECIFICATIONS

<b>Pedestal Dimensions (standard and ADA)</b> <ul style="list-style-type: none"> <li>■ Height: 38.0" (965 mm)</li> <li>■ Width: 7.4" (188 mm)</li> <li>■ Length: 59.5" (1,510 mm)</li> </ul>	<b>Barrier Glass Dimensions</b> <ul style="list-style-type: none"> <li>■ Height from floor: 33.2" (845 mm)</li> <li>■ Std. width: 11" (280 mm)</li> <li>■ ADA width: 16.0" (407 mm)</li> <li>■ 43" width: 19.7" (500 mm)</li> <li>■ 46.9" width: 21.7" (550 mm)</li> </ul>	<b>Inputs from Access Control</b> <ul style="list-style-type: none"> <li>■ Require voltage-free switching (current sense 1 mA typical)</li> <li>■ Entry request (normally open closing for &lt; 1 second)</li> <li>■ Exit request (normally open closing for &lt; 1 second)</li> <li>■ Visitor access in &amp; out (normally open momentary push button)</li> <li>■ Fire panel integration- Optocoupled Input 12-24 V DC @ 25mA nominal</li> </ul>
<b>Center Glass Panel Material</b> <ul style="list-style-type: none"> <li>■ .39" (10mm) Toughened Safety Glass (Heat Soaked) EN14179 / ANSI Z97.1</li> </ul>	<b>Barrier Breakaway Force</b> <ul style="list-style-type: none"> <li>■ 60N (6.1 kg) nominal</li> </ul>	
<b>Lane Width</b> <ul style="list-style-type: none"> <li>■ Std. lane: 26.0" (660 mm)</li> <li>■ ADA lane: 36.0" (914 mm)</li> <li>■ Can go up to: 47.24" (1,200 mm)</li> </ul>	<b>Operating Modes</b> <ul style="list-style-type: none"> <li>■ Card in/card out</li> <li>■ Card entry/free exit</li> <li>■ Free entry/card out</li> <li>■ Free entry/free exit</li> </ul>	<b>Outputs to Access System</b> <ul style="list-style-type: none"> <li>■ Voltage free relay contacts rated 0.5A, 28 V DC for output to system</li> <li>■ Lane entered (NC)</li> <li>■ Lane exited Exit (NC)</li> <li>■ Alarm 1 (NC, opening for 1s)</li> <li>■ Alarm 2 (NC, opening for 1s)</li> </ul>
<b>Throughput*</b> <ul style="list-style-type: none"> <li>■ 1 person / second maximum (subject to response time of access control system)</li> </ul>	<b>Power Requirements</b> <ul style="list-style-type: none"> <li>■ Input: 115 V AC, 60 Hz or 230 V AC, 50 Hz</li> <li>■ Output: 24 V DC, 60 W, 1.25 A</li> </ul>	<b>Display</b> <ul style="list-style-type: none"> <li>■ Tri-color end of turnstile indicators: red, white, green</li> </ul>
<b>Tailgate Detection Distance</b> <ul style="list-style-type: none"> <li>■ 1/4" (5 mm) minimum</li> </ul>	<b>Reliability</b> <ul style="list-style-type: none"> <li>■ 5,000,000+ cycles*</li> </ul>	<b>Ethernet Connection</b> <ul style="list-style-type: none"> <li>■ RJ45 TCP/IP port</li> </ul>
<b>Audible Indicators</b> <ul style="list-style-type: none"> <li>■ Single tone sounder: card authorization and turnstile obstructions</li> <li>■ Multi-tone variable volume sounder: alarm condition</li> </ul>	<b>Optics</b> <ul style="list-style-type: none"> <li>■ Optical turnstile - 56 pulsed multi-infrared beam array, synchronized for detection and safety</li> <li>■ Environmentally hardened to avoid sunlight interference</li> </ul>	

\* Expected time to pass through turnstile.  
 \* In normal use, 5,000,000 cycles of operation is expected before electromechanical subassemblies may require replacement as part of an approved preventative maintenance program.  
 \* Fastlane logo present on left-most pedestal base. Removal available upon request.  
 \* Due to continuous improvements, specifications are subject to change without prior notice.