



Barrier turnstiles

Fastlane® Glassgate 400 Plus

Product Features
Glassgate 400 Plus

Pedestal Footprint (L x W x H)	67.24" x 8.6" x 41.85" (1708 x 218 x 1063mm)
Available Lane Widths	26.0" / 36.0" / 43.3" / 47.24" (660 / 914 / 1100 / 1200mm)
Barrier Heights	41.8" / 47.2" / 59.1" / 70.9" (1062 / 1199 / 1501 / 1801mm)
Brake Strength	≥ 120N / ≥ 300N (option)
Tailgate Detection	1/4" (5mm)
Throughput	1 per second

Sustainability

- LEED Preferred Manufacturing
- Low Voltage/Low Power Consumption
- ISO 14001:2015 Accreditation



PINPOINT ACCURACY



UNSURPASSED THROUGHPUT



SUPERIOR DESIGN



FIELD PROVEN RELIABILITY

Smart detection reduces false alarms

- Differentiates body mass from smaller objects
- Provides instant feedback of traffic flow and incidents

Lower costs, higher ROI

- High processing speed reduces traffic build-up
- Door-like motion ensures quick user acceptance

Elegant designs accentuate lobby

- Glass barriers provide secure and welcome entry
- Barriers open flush with the pedestal, minimizing footprint

Maximized uptime boosts profitability

- Fewer failures mean lower repair costs
- Online diagnostics and support packages

Premium Security

Fastlane Glassgate 400 Plus now offers the extra advantage over Glassgate 400 in that larger maximum lane widths can be achieved. The GG400 Plus can **offer lane widths up to 47.24" wide** to allow comfortable passage of large wheelchairs. This new, large access way is now monitored by an enhanced version of the legendary Fastlane optical system capable of detecting 'sidegating', the possible collusion of two people attempting to enter side by side with just one authorization.

Advanced Security Technology

Utilizing cutting-edge optical detection technology for unparalleled accuracy and safety.

- **36-beam** high-resolution infrared matrix
- Detects tailgaters as close as **1/4" (5mm)** apart
- Can differentiate between body mass and smaller objects

User-Friendly Design

Engineered for quick acceptance and smooth operation in high-traffic areas.

- Barriers close slowly when safety beams detect an obstruction
- Automatic local alarm for unauthorized entry
- Fire alarm integration for emergency egress

Flexible Integration

Seamlessly connects with existing building systems for comprehensive security management.

- Compatible with Access Control, CCTV, and building management systems
- **Fastlane Connect™ ethernet communications** for remote control and diagnostics that enables Web-based turnstile control from any PC, tablet, smartphone, or from Fastlane's Multilane Controller.
- Optional visitor management input

Durability and Reliability

Built to last, ensuring long-term performance and minimizing maintenance needs.

- In normal use, **10,000,000 cycles of operation**
- High-quality construction for lower whole-life costs
- Reduced failures and repair costs

Customizable Options

Adaptable to various architectural styles and accessibility requirements.

- **Finishes:** Wide range of metal colors, textures, and wood-like options.
- **Glass Barriers:** Custom graphics, logos, or decorative accents available.
- **Tops:** Choose from elliptical or square end caps, with top options available in glass, stone, metal, and more.

Certifications (power supply only)

- UL 60950-1
- CSA C22.2 No. 60950-1-07, second edition

Accessories

- Fastlane Floor Protector
- Fastlane Infill System
- Multiple desktop controls - IP or Analog
- FastScan™ Tenant/Visitor System
- Multiple Reader Mounting Options
- FastCmd™
- Top Sensors for climb-over detection
- Locking Brakes


Please see Fastlane accessories data sheets for additional details.

DETAILS

Fastlane Glassgate 400 Plus dimensions

(standard, single turnstile)

Please see the Glassgate 400 Plus Drawing Pack for additional details.

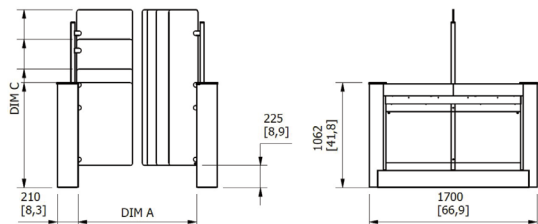

FASTLANE GLASSGATE 400 PLUS TECHNICAL SPECIFICATIONS

Enclosure material	Stainless steel 304, 240 grit (satin no. 4), horizontal grain
Weight (Interlane Pedestal)	302lbs / 137kg
Weight (RX/TX Pedestal)	231.5lbs / 105kg
Barrier material	12mm Toughened Safety Glass BS EN12150 12mm Toughened/Laminated Safety Glass for 1500mm and 1800mm Tall options BS EN12150 & BS EN14449
Barrier Breakaway Force - Friction	≥ 120N (measured at 285mm from the shaft axis)
Maximum Rated Force - Locking Brakes	≥ 300N* (Damage to Glass clamps and panel may occur above rated force)

Environmental

Temperature	41 to 122°F (5 to 50°C)
Relative humidity	5 to 95% non-condensing
Energy consumption per lane	589kW hours per annum
Ingress protection	IP20 (Internal building applications only)

Turnstile Power Specifications

Receive Gate / Transmit Gate	24Vdc 1.5A (max)
Dual Gate Interlane	2x 24Vdc 1.5A (max)

24Vdc Power Supply (Included)

Enclosure	Black mild steel, wall mounted, 13" x 8" x 5.5" (330 x 203 x 140mm)
Modules	Dual or quad 24Vdc 2.5A overcurrent fold back
Input voltage	100-240Vac, 60/50Hz, 5A fused spur connection
Outputs	24 V DC, 60 W, 1.25 A

Access Control Inputs

Voltage-free contact; 1mA current sense	Entry & Exit request (NORMALLY OPEN closing for 1 second)
Screw terminal connector	Visitor entry (NORMALLY OPEN momentary closing contact)
Max conductor CSA 16AWG/ 1.5mm2	Visitor exit (NORMALLY OPEN momentary closing contact)
Fire panel integration input	Opto-coupled Input12-24Vdc @ 25mA nominal
Ethernet connection	RJ45 TCP/IP Port

Access Control Outputs

Voltage-free contact; Contact Rating 28Vdc 0.5A	Entry & Exit monitor (NORMALLY CLOSED opening for 1 second)
Screw terminal connector	Alarm 1 (NORMALLY CLOSED opening for 1 second)
Max conductor CSA 16AWG/ 1.5mm2	Alarm 2 (NORMALLY CLOSED opening for 1 second)

System Outputs

Turnstile status display	RGB LED diffused through 10mm high clear frosted acrylic
Alarm sounder output	75 – 100 dB (93dB at 1 meter)

* In normal use, 10,000,000 cycles of operation is expected before electromechanical subassemblies may require replacement as part of an approved preventative maintenance program.

*Fastlane logo present on left-most pedestal base. Removal available upon request.

* Due to continuous improvements, specifications are subject to change without prior notice.



With thousands of systems installed on six continents, Fastlane is a world leader in elegant and intelligent optical turnstiles.

Manufactured by Integrated Design Limited. Fastlane is a registered trademark of IDL, 1995.



www.smartersecurity.com | 800.943.0043

24/7 Technical Support

©Copyright 2026, Smarter Security. All Rights Reserved.
Smarter Security is a registered trademark of Smarter Security, Inc.
Fastlane and Door Detective is a registered trademark of Integrated Design, Ltd.