

Single Barrier with Versatility

A new take on a classic, the Passgate 300 unit is a single pedestal, single barrier gate available in multiple heights and widths to suit a wide range of applications. Utilizing the proven GG300 engine the new Passgate is designed as an accessory to the hugely successful Fastlane Turnstile range. Conceived for use as an occasional lane for deliveries and oversized objects that may not fit through our standard range.

Advanced Security Technology

The Passgate 300 is a physical deterrent designed to control unauthorized access under staff supervision. Here are three key features:

- Opens upon authorized command or proper user credentials
- Glass barrier swings in the direction of travel
- Configurable open time or manual closure by security staff

User-Friendly & Safe

Engineered for quick acceptance and smooth operation in high-traffic areas.

- Automatic local alarm for unauthorized entry
- Fire alarm integration for emergency egress

Flexible Integration

Seamlessly connects with existing building systems for comprehensive security management.

- Compatible with Access Control, CCTV, and building management systems
- **Fastlane Connect™** enables remote control and diagnostics of turnstiles via Ethernet from any PC, tablet, or smartphone, or through Fastlane's Multilane Controller.
- Optional visitor management input

Barrier turnstiles

Fastlane® Passgate 300

Product Features

Fastlane Passgate 300

Pedestal footprint (L x W x H in inches)	9.4 x 38
Available Lane widths (in inches)	23.6 / 27.5 / 39.3
Barrier Heights (in inches)	38 / 47.2 / 59.1 / 66.9 / 70.9
Brake Strength	≥ 60N / ≥ 300N (option)
Opening/ closing time	2 – 6 seconds (subject to barrier size)

Sustainability

- LEED Preferred Manufacturing
- Low Voltage/Low Power Consumption
- ISO 14001:2015 Accreditation



PINPOINT ACCURACY

Superior entry control

- Occasional gate for use with wheelchairs, groups or deliveries



Features

Lower costs, higher ROI

- Quick and safe action
- Door-like motion ensures quick user acceptance



SUPERIOR DESIGN

Elegant designs accentuate lobby

- Glass barrier provide secure and welcome entry
- Barrier open flush with the pedestal, minimizing footprint



FIELD PROVEN RELIABILITY

Maximized uptime boosts profitability

- Fewer failures mean lower repair costs
- Online diagnostics and support packages

Durability and Reliability

Built to last, ensuring long-term performance and minimizing maintenance needs.

- In normal use, **10,000,000 cycles of operation**
- High-quality construction for lower whole-life costs
- Reduced failures and repair costs

Customizable Options

Adaptable to various architectural styles and accessibility requirements.

- **Finishes:** Wide range of metal colors, textures, and wood-like options.
- **Tops:** Choose from square or round pedestal end caps, with top options available in glass, stone, metal, and more.

Certifications (power supply only)

- UL 60950-1
- CSA C22.2 No. 60950-1-07, second edition

Accessories

- Fastlane Floor Protector
- Fastlane Infill System
- Multiple desktop controls - IP or Analog
- FastScan™ Tenant/Visitor System
- Reader Mounting Post
- FastCmd™


Please see Fastlane accessories data sheets for additional details.

DETAILS

Fastlane Intelligate 300 dimensions

(single gate)

Please see the Fastlane Intelligate 300 Drawing Pack for additional details.

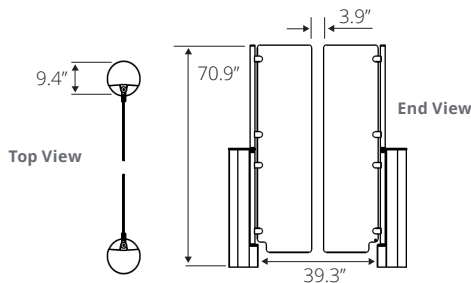

FASTLANE PLUS 400 AS TECHNICAL SPECIFICATIONS

Enclosure material	Stainless steel 304, 240 grit (satin no. 4), horizontal grain
Weight (RX/TX Pedestal)	52.9lbs / 24kg
Barrier material	10mm Toughened Safety Glass EN12150 12mm Toughened/Laminated for 1800mm Tall option EN12150/EN14449
Barrier Breakaway Force - Friction	≥ 60N (measured at 285mm from the shaft axis)
Maximum Rated Force - Locking Brakes	≥ 300N* (Damage to the Glass clamps and panel may occur above rated force)

Environmental

Temperature	5 to 50 degrees centigrade
Relative humidity	5 to 95% non-condensing
Energy consumption per lane	421kW hours per annum
Ingress protection	IP20 (Internal building applications only)

Turnstile Power Specifications

Per Pedestal	24Vdc 1.25A (max)
--------------	-------------------

24Vdc Power Supply (Included)

Enclosure	Black mild steel, wall mounted, 13" x 8" x 5.5"
Modules	Dual or quad 24Vdc 2.5A overcurrent fold back
Input voltage	100-240Vac, 60/50Hz, 5A fused spur connection
Outputs	24 V DC, 60 W, 1.25 A

Access Control Inputs

Voltage-free contact; 1mA current sense	Entry & Exit request (NORMALLY OPEN closing for 1 second)
Screw terminal connector	Visitor entry (NORMALLY OPEN momentary closing contact)
Max conductor CSA 16AWG/ 1.5mm ²	Visitor exit (NORMALLY OPEN momentary closing contact)
Fire panel integration input	Opto-coupled Input12-24Vdc @ 25mA nominal
Ethernet connection	RJ45 TCP/IP Port

Access Control Outputs

Voltage-free contact; Contact Rating 28Vdc 0.5A	
Screw terminal connector	Alarm 1 (NORMALLY CLOSED opening for 1 second)
Max conductor CSA 16AWG/ 1.5mm ²	

System Outputs

Turnstile status display	RGB LED diffused through 10mm high clear frosted acrylic
Alarm sounder output	98dB approx

* In normal use, 10,000,000 cycles of operation is expected before electromechanical subassemblies may require replacement as part of an approved preventative maintenance program.

*Fastlane logo present on left-most pedestal base. Removal available upon request.

* Due to continuous improvements, specifications are subject to change without prior notice.



With thousands of systems installed on six continents, Fastlane is a world leader in elegant and intelligent optical turnstiles.

Manufactured by Integrated Design Limited. Fastlane is a registered trademark of IDL, 1995.

