



Supplemental Barrier Used With Fastlane Turnstiles

With a design aesthetic that matches Fastlane turnstiles, the Fastlane Infill system is a sleek and effective method for controlling the flow of traffic.

Security

The Fastlane Infill system enhances security through seamless integration with Fastlane turnstiles, creating a unified and visually appealing barrier solution. It comes in three distinct versions:

- **Fixed Infill System:** a permanent barrier solution that enhances existing turnstile installations for better access control.
- **Free Standing Infill System:** provides flexible placement and configuration for adaptable security setups.
- **Wall Mounted Infill:** a single glass panel for gaps up to 20" (500 mm), perfect for securing narrow spaces with elegance.

FASTLANE INFILL TECHNICAL SPECIFICATIONS

Cable Access	3.94"x.63" (100x16mm)
Fixed Infill Post & Fittings	
Materials	Brushed stainless steel
Post height	38" (965mm)
Post diameter	1.9" (48mm)
Base diameter	5" (125mm)
Post configurations (Fixed Infill only)	Posts can be configured as middle or end pieces as well as at 90 or 135 angles
Fittings	2 x M10 fittings (fixed-only)
Glass Panels	
Materials	.4" (10 mm) clear toughened glass
Fixed Infill panel widths	<ul style="list-style-type: none"> ■ 19.7" (500 mm), post center to post center ■ 39.4" (1000 mm) ■ Custom width up to 39.4"(1000 mm)
Panel heights	<ul style="list-style-type: none"> ■ Standard height for all models is - 39" (1000mm) ■ Fixed/ Wall Mounted infill fullheight: 70.9" (1800 mm)
Free Standing Infill: panel widths	<ul style="list-style-type: none"> ■ 19.7" (500 mm) ■ 39.4" (1000 mm)
Wall Mounted Infill: panel widths	<ul style="list-style-type: none"> ■ For gaps up to 20" (500mm) wide ■ Minimum gaps of 11.8" (300 mm)

*Due to continuous improvements, specifications are subject to change without prior notice.

Accessories

Fastlane[®] Infill System




Fixed Infill System



Free Standing Infill System


1. Fixed Infill System dimensions

(standard)

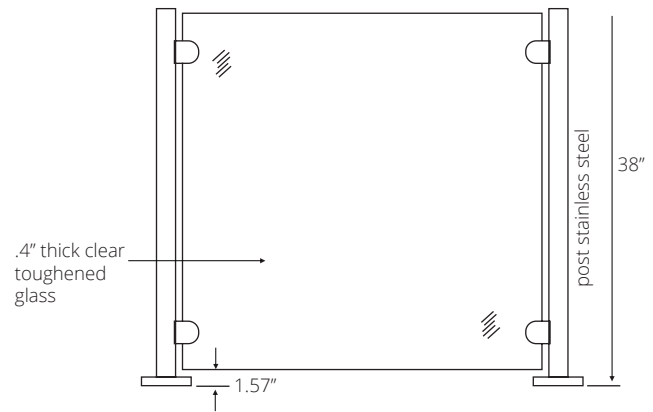


2. Fastlane Free Standing Infill System dimensions

(standard)

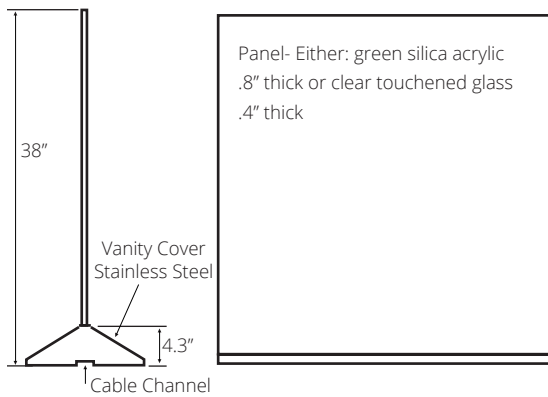

3. Fastlane Wall Mounted Infill

(standard)

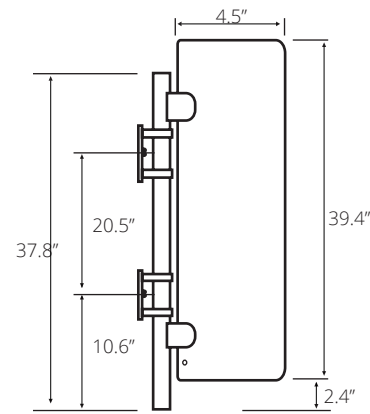

The Fastlane Wall Mounted Infill is available for gaps minimum of 11.8" (300mm) to a maximum of 20" (500mm). Available in 1000, 1500, and 1800 tall Infill.