




Security

While all three models physically prevent entry via naturally occurring gaps outside of your entry control system, the freestanding model is also equipped with a tamper alarm that detects if the infill is moved.

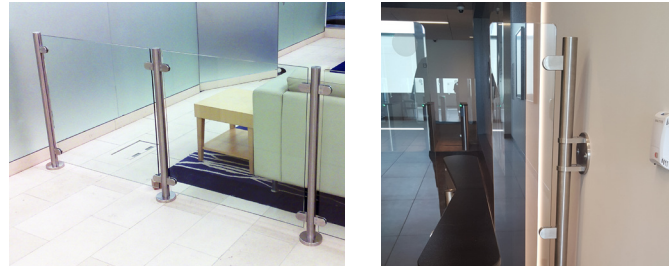

TECHNICAL SPECIFICATIONS

Post dimensions Fixed model:	Materials	Cable Access
<ul style="list-style-type: none"> Post Height: 38" (965 mm) Diameter: 1.9" (48 mm) Base Diameter: 5" (125 mm) Fixings: 2 x M10 fixings (fixed-only) 	<ul style="list-style-type: none"> Panels: .4" (10 mm clear toughened glass) Posts and fittings: brushed stainless steel 	<ul style="list-style-type: none"> 3.94"x.63" (100x16mm)
Panel width	Panel height	Post Configurations (fixed Infill only)
<ul style="list-style-type: none"> 19.7" (500 mm), post center to post center 39.4" (1000 mm) Custom width up to 39.4"(1000 mm) 	<ul style="list-style-type: none"> Standard height for all models is - 39" (1000 mm) Fixed/ Wall Mounted infill fullheight: 70.9" (1800 mm) 	<ul style="list-style-type: none"> Posts can be configured as middle or end pieces as well as at 90 or 135 angles
<p>Free-standing Model Options:</p> <ul style="list-style-type: none"> 19.7" (500 mm) 39.4" (1000 mm) <p>Wall Mounted:</p> <ul style="list-style-type: none"> For gaps up to 20" (500 mm) wide Minimum gaps of 11.8" (300 mm) 		

* Due to continuous improvements, specifications are subject to change without prior notice.

Accessories

Fastlane[®] Infill System

Supplemental barrier used with


Fastlane turnstiles

With a design aesthetic that matches Fastlane turnstiles, the Fastlane Infill system is a sleek and effective method for controlling the flow of traffic.


The system is available in 3 versions. A Fixed Infill System, a Free Standing Infill System, and a Wall Mounted infill comprising of a single glass for small gaps up to 20 inches (500 mm) pedestals.

DETAILS


1. Fixed Infill System dimensions (standard)

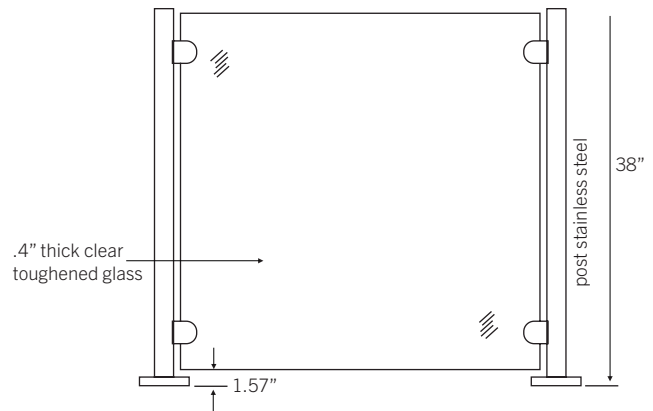

2. Fastlane Free Standing Infill System dimensions (standard)

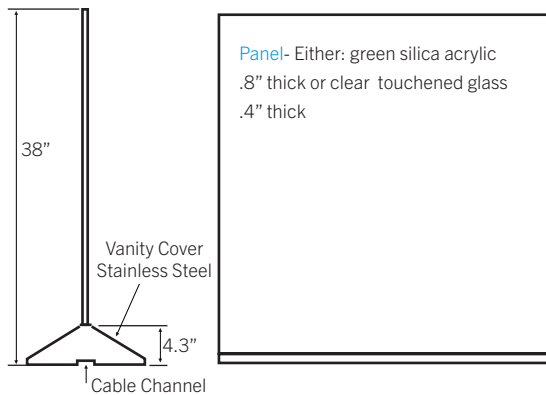

3. Fastlane Wall Mounted Infill

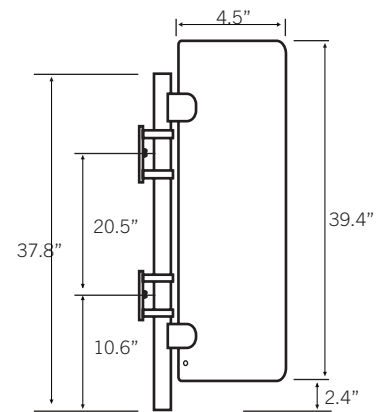

The Fastlane Wall Mounted Infill is available for gaps minimum of 11.8" (300mm) to a maximum of 20" (500mm). Available in 1000, 1500, and 1800 tall Infill.