

Barrier turnstiles

Fastlane® Glassgate 250 Plus

BARRIER TYPE

FOOTPRINT

GLASS

ARM

OPTICAL



Elevating Corporate Entrance Control

The Fastlane Glassgate 250 Plus is meticulously crafted to offer an elegant entrance control solution for corporate enterprises. It seamlessly integrates with elevator displays and supports various reader technologies. With adjustable glass barrier heights ranging from pedestal height to 66.9" tall, the GG250 Plus caters to diverse security requirements.

Advanced intelligence

Fastlane turnstiles have an advanced architecture based on distributed intelligence. An infrared beam matrix engineered with multiple microprocessors monitors pedestrian movement with pinpoint accuracy, detecting tailgaters as close as 1/4" apart. Inherently more secure, this technology also enables the fastest entry and minimizes false alarms.

IP enabled

Glassgate 250 Plus features Fastlane Connect™, a TCP/IP communication and control system that enables Web-based turnstile control from any PC, tablet, smartphone, or from Fastlane's Multilane Controller.

Operation

Glassgates are designed to work in a normally closed mode, opening only after an access system approval. The glass barrier swings away from an authorized user. Barriers then either:

- Close quickly behind the authorized person to deter tailgaters
- Stay open for immediate additional authorized users passing in either direction

Glassgate will automatically sound a local alarm if someone enters without authorization.

- Efforts to push past the glass barrier will sound a second, louder alarm
- A secondary relay can trigger CCTV, lock doors, or control elevators
- Optional locking brake for more secure environments

User-friendly and safe

Fastlane Speedgates feature up to 32 safety beams designed to stop the barriers from moving in the event that any of the beams are broken. The units feature a fire alarm input to allow for unimpeded emergency egress and the units can be configured to fail safe in the event of power fail.


HIGH SECURITY

PINPOINT ACCURACY

**UNSURPASSED
THROUGHPUT**

SUPERIOR DESIGN

**FIELD-PROVEN
RELIABILITY**

Advanced technology for superior entry control

- Detects and deters tailgaters in very close proximity
- Class leading infrared detection systems

Intelligence virtually eliminates false alarms

- Differentiates body mass from smaller objects
- Provides instant feedback of traffic flow and incidents

Greater return on investment

- High processing speed reduces traffic build-up
- Door-like motion ensures quick user acceptance

Refined, elegant designs accentuate lobby

- Glass barriers provide secure and welcome entry
- Barriers open flush with the pedestal, minimizing footprint

Uptime and long lifetime improve bottom line

- Fewer failures mean lower repair costs
- Online diagnostics and support packages

Materials

- Barriers: 10mm Toughened Safety Glass EN12150
- Side panels and end caps: Stainless steel 304, 240 grit (satin no.4), horizontal grain
- Beam windows: Perspex® 962

In addition to a choice between elliptical or squared pedestal ends, a variety of premium and custom options are available to ensure Fastlane complements building aesthetics.

Visitor management

Fastlane features an optional visitor management input. When activated, unlimited access is allowed for a designated period, after which the system returns to its secure state.

Disabled access

Fastlane is compliant with ADA as well as most international standards. A wider lane using the same slim pedestals allows for wheelchair or cart access. Audio/Visual feedback is standard.

Options/Accessories

- Fastlane Technical Services
- Fastlane Floor Protector
- Fastlane Infill System
- Multiple desktop controls - IP or Analog
- FastScan™ Tenant/Visitor System
- Multiple Reader Mounting Options
- Locking Barriers
- Icon Status Display


Please see Fastlane accessories data sheets for additional details.

DETAILS

Fastlane Glassgate 250 Plus dimensions

(standard, elliptical ends, single turnstile)

Please see the Glassgate 250 Plus Drawing Pack for additional details.

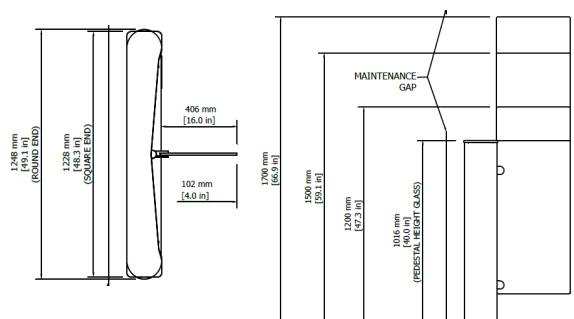

FASTLANE GLASSGATE 250 PLUS TECHNICAL SPECIFICATIONS

Pedestal dimensions (standard and ADA) <ul style="list-style-type: none"> Height: 40" (1,016 mm) Width: 7.4" (188 mm) Length square ends: 48.3" (1,228 mm) Length elliptical ends: 49.1" (1,248 mm) 	Barrier glass dimensions <ul style="list-style-type: none"> Std. height: 66.9" (1,700 mm) 59.0" (1,500 mm) 47.2" (1,200 mm) Pedestal-level height: 40.0" (1,016 mm) Barrier breakaway force <ul style="list-style-type: none"> 60N (6.1 kg) nominal Available locking barriers 300 N (30 kg) 	Inputs from Access Control <ul style="list-style-type: none"> Require voltage-free switching (current sense 1 mA typical) Entry request (normally open closing for < 1 second) Exit request (normally open closing for < 1 second) Visitor access in & out (normally open momentary push button) Fire panel integration- Optocoupled Input 12-24 V DC @ 25mA nominal
Opening time <ul style="list-style-type: none"> 1 second 	Operating modes <ul style="list-style-type: none"> Card in/card out Card entry/free exit Free entry/card out Free entry/free exit 	Outputs to Access System <ul style="list-style-type: none"> Voltage free relay contacts rated 0.5A, 28 V DC for output to system Lane entered (NC) Lane exited Exit (NC) Alarm 1 (NC, opening for 1s) Alarm 2 (NC, opening for 1s)
Lane width <ul style="list-style-type: none"> Standard lane: 26" (660 mm) ADA lane: 36" (914 mm) 	Power requirements <ul style="list-style-type: none"> Input: 100-240Vac, 60/50Hz, 5A fused spur connection Output: 24 V DC, 60 W, 1.25 A 	Display <ul style="list-style-type: none"> RGB LED diffused through 10mm high clear frosted acrylic
Throughput* <ul style="list-style-type: none"> 1 person / second maximum (subject to response time of access control system) 	Reliability <ul style="list-style-type: none"> 5,000,000+ cycles* 	Alarm sounder output <ul style="list-style-type: none"> 75 – 100 dB (93dB at 1 metre)
Tailgate detection distance <ul style="list-style-type: none"> 1/4" (5 mm) minimum 	Ethernet connection <ul style="list-style-type: none"> RJ45 TCP/IP port 	Optics <ul style="list-style-type: none"> Optical turnstile - pulsed multi-infrared beam array, synchronized for detection and safety Environmentally hardened to avoid sunlight interference
Audible indicators <ul style="list-style-type: none"> Single tone sounder: card authorization and turnstile obstructions Multi-tone variable volume sounder: alarm condition 		

* Expected time to pass through turnstile.

* In normal use, 5,000,000 cycles of operation is expected before electromechanical subassemblies may require replacement as part of an approved preventative maintenance program.

*Fastlane logo present on left-most pedestal base. Removal available upon request.

* Due to continuous improvements, specifications are subject to change without prior notice.